

DSM-CS001 CABLE SEAL

The high-quality **DIO DSM-CS01** Cable Seal is made up of a die-cast aluminium body and a non-performed galvanized steel cable. It is provided in multiple cable lengths and diameters that can be applied for any requirement. The cable has a welded tip for easy locking and it needs a special cutter for the removal.

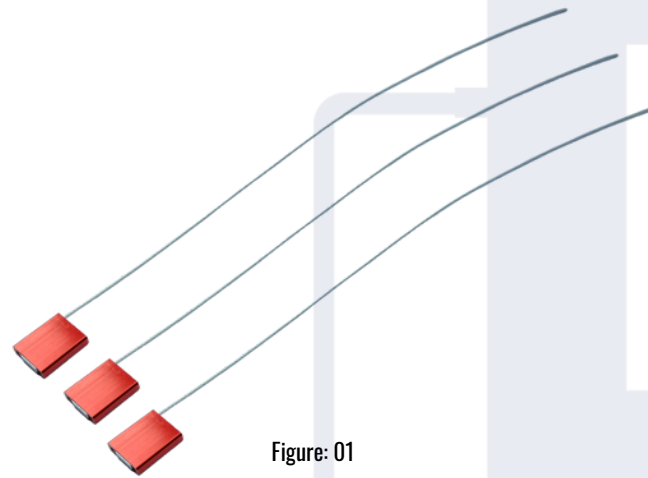


Figure: 01

Recommended Applications

Trailers, Tankers, Rail Freight, Containers, Refineries, Warehouses

Material

Lock Body: Die-Cast Aluminium
Cable: Non - Preformed Galvanized Steel

Standard Colours

Blue, Green, Yellow, and white.
Other colors may be available on request.

Acceptance

DSM-CS01 is compliant to ISO17712:2013 (E)

Cable Diameter

1.5mm, 2mm, 2.5mm, 3.5mm & 5mm

Marking

Laser marking Consecutively numbered as standard
Optional Customer Name/Log

Breaking Strengths

| Modal | Cable Diameter | Lock Body Dimensions (L*W*T) | Tensile Strength (kg) |
|-------|----------------|------------------------------|-----------------------|
| A | 1.5 | 26*20*6 | 150 |
| B | 2.5 | 26*20*6 | 250 |
| C | 3.5 | 26*26*7.5 | 900 |
| D | 5.0 | 30*38*10 | 1500 |

Available Cable Lengths

20cm - 400cm

Packaging

Standard Packaging (30cm wire length) 100 seals bag and 10 bags/carton (1000 seals)

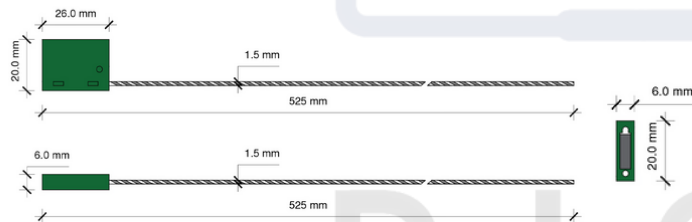


Figure: 02